
REYNOLDS RESIDENCE

304 BEACON ST UNIT 1 BOSTON MA 02116

ABBREVIATIONS & SYMBOLS ARCHITECTURAL ABBREVIATIONS OC AND ON CENTER ΑT ENG ENGINEER OVERALL/OUTSIDE DIM OD EQUAL; EQUIVALENT OP'G AIR CONDITIONING OPENING EQUIP EQUIPMENT OPH OPPOSITE HAND ACCOMMODATE OPP OPPOSITE ACOUSTIC CEILING TILE EX'G EXISTING PARTITION; PARTIAL PART **ADJACENT** EXPOSED PROVIDED BY OTHER/OWNER **ADJUSTABLE** EXP JT EXPANSION JOINT PCC EXT PRE-CAST CONCRETE ABOVE FINISHED FLOOR EXTERIOR ALT PLATE ALTERNATE FINISH DIMENSION ALUMINUM FDN FOUNDATION PLAM PLASTIC LAMINATE PLAS PLASTER ANOD ANODIZED FINISH FLOOF **ACCESS PANE** FIN PLUMB PLUMBING APPROXIMATELY FIX FIXTURE PLYWD PLYWOOD PNT PAINT/PAINTED FLASHING FLOOR (ING) ASPH ASPHAL^{*} POL POLISHED **BASEBOARD** FLUOR FLUORESCENT POS POSITIVE F.O. FACE OF **BUNDLED CABLE** PRELIM PRELIMINARY **FIREPROOFING** PVC POLYVINYL CHLORIDE BOARD FIREPROOF SELF-CLOSING RISER BEY BEYOND RETURN AIR BITUMINOUS FIRE RESISTANT RADIUS; RADIATOR BLDG FINISH SLAB **BUILDING** FT (') FOOT; FEET BLK RCP REFLECTED CEILING PLAN RD, RND ROUND FTG BLOCKING GAUGE GΑ RECPT RECEPTACLE REF REFER TO; REFRIGERATOR **BOTTOM OF** B.O. GALV GALVANIZED GC GENERAL CONTRACTOR REINF REINFORCED REQ'D REQUIRED BTW GD GROUND **BETWEEN** CAB **CABINET** GFI GROUND FAULT INTERRUPTER RES RESILIENT REVEAL CBB CEMENTITIOUS BACKER BOARDGL GLASS REV CDR GYPSUM WALL BOARD ROOM CEMENT; CEMENTITOUS CEM HD HAND: HEAD ROUGH OPENING CFM CUBIC FEET PER MINUTE HDR HEADER SBO SUPPLIED BY OTHER CHR CHROME SCHED SCHEDULE HDWR HARDWARE HT, HGT HEIGHT SEC CENTERLINE SECTION CAST-IN-PLACE HOLLOW METAL SIM SIMILAR CJT CONTROL JOINT HORIZ HORIZONTAL SOF SOFFIT CLG HOUR SPRINKLER CEILING HVAC HEATING, VENTILATION & A/C CLEAR(ANCE) SPECIFIATION; SPECIFIED CLR SPEC HOT WATER SQ SQUARE CMU CONCRETE MASONRY UNIT IN (") COL COLUMN INCH STAINLESS STEEL INCLUDED; INCLUDING STL STEEL COMBO COMBINATION INSULATION; INSULATED STR STRAIGHT CONCRETE INT INTERIOR STOR STORAGE CONSTRUCTION STRUCT STRUCTURE; STRUCTURAL CONTINUOUS COORD COORDINATE LENGTH SUSP SUSPENDED **CENTER POINT** LACQ LACQUER TREAD LAMINATED; LAMINATIONS CPT TFI TELEPHONE CARPET CERAMIC TILE LAVATORY TEMPERATURE/TEMPERED T&G **TONGUE & GROOVE** CTR CENTER LINEAR LIN THICK; THICKNESS THK CW COLD WATER LCC LEAD COATED COPPER CWR CLEAR WESTERN RED CEDAR LT LIGHT TLT TOILET DEPTH; DEEP TOP OF T.O. MASONRY DEG (°) T.O.S TOP OF SLAB DEGREE MAXIMUM DEMO DEMOLITION TYP TYPICAL MECH MECHANICAL UNLESS NOTED OTHERWISE DEPT **DEPARTMENT** MEMB MEMBRANE UNO DIA MFR MANUFACTURER VAPOR BARRIER DIAMETER VΒ VINYL COMPOSITION TILE MID MIDDLE VCT DIAG DIAGONAL DIF DIFFUSER MINIMUM VEN VENEER MISC MISCELLANEOUS VERT VERTICAL DIM DIMENSION VERIFY IN FIELD DMPR DAMPER MLWK MILLWORK WIDTH DN DOWN MGMT MANAGEMENT DR DOOR MASONRY OPENING WITH DTL MRGWB MOISTURE RESISTANT GWB WC WATER CLOSET DETAIL W/D WASHER & DRYER **DISHWASHER** MTL METAL DW DWG DRAWING NIC NOT IN CONTRACT WD WOOD NO (#) NUMBER EACH EΑ WIN WINDOW WATERPROOF ELECTRICAL NOM NOMINAL WPF NTS NOT TO SCALE WPM WATERPROOF MEMBRANE **ELEV ELEVATION** W/O WITHOUT **EMER** EMERGENCY OVERALL ARCHITECTURAL SYMBOLS LEGEND DESCRIPTION SYMBOL SECTION REFERENCE: ROOM TAG: NAME, NUMBER, & DISPLAYS DWG NO & SHEET NO

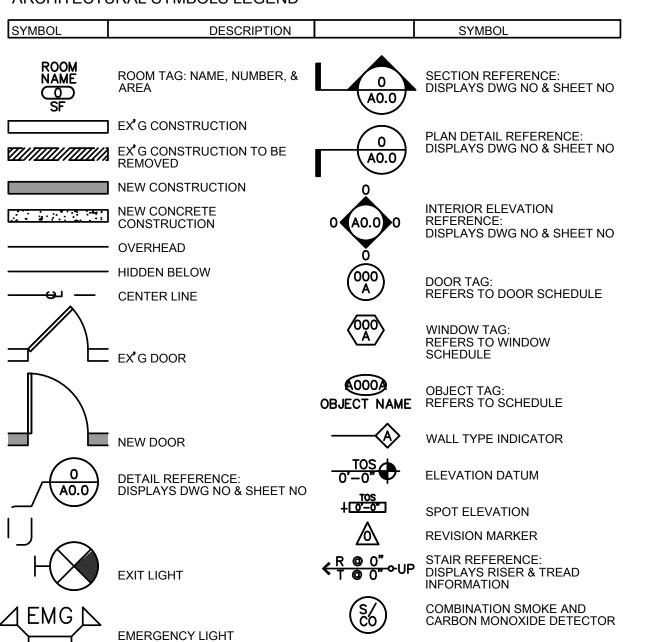

NOTES

BUILDING DEPARTMENT NOTES

. ALL REFERENCES TO THE 'BUILDING CODE' OR 'THE CODE' SHALL REFER TO THE BUILDING CODE OF THE CITY OF BOSTON AND/OR MASSACHUSETTS STATE BUILDING CODE 2016 UNLESS OTHERWISE STATED.

2. CONTRACTORS SHALL COMPLY WITH ALL REQUIREMENTS OF LOCAL BUILDING CODES, STATE LABOR LAW AND ALL REGULATIONS OF THE CITY OF BOSTON AND MASSACHUSETTS STATE. ALL PERMITS SHALL BE PROPERLY

3. MEANS OF EGRESS SHALL BE KEPT UNOBSTRUCTED AT ALL TIMES AS PER THE CODE.

4. CONTRACTOR SHALL BE RESPONSIBLE FOR OBTAINING AND PAYING FOR ALL PERMITS, APPROVALS, TESTING AND INSPECTIONS AS MAY BE REQUIRED BY THE DEPARTMENT OF BUILDINGS, ENVIRONMENTAL PROTECTION AGENCY, AIR RESOURCES AND THE FIRE DEPARTMENT AS PER THE CODE

5. CONTRACTOR SHALL OBTAIN AND PAY FOR ALL REQUIRED DEPARTMENT OF BUILDINGS PERMITS PRIOR TO THE START

6. ALL MATERIALS OR ASSEMBLIES REQUIRED TO HAVE A FIRE RESISTANCE RATING SHALL COMPLY WITH ONE OF THE FOLLOWING: A. IT SHALL CONFORM WITH MFBU 'FIRE RESISTANCE

RATINGS' DECEMBER 1964. B. IT SHALL HAVE BEEN TESTED IN ACCORDANCE WITH ASTM E-119-1961 'STANDARD METHODS OF FIRE TESTS OF BUILDING CONSTRUCTION AND MATERIALS' AND ACCEPTED BY THE COMMISSIONER. C. IT SHALL HAVE BEEN ACCEPTABLE PRIOR TO THE EFFECTIVE DATE OF THE CODE.

7. ALL CONCEALED SPACES WITHIN PARTITIONS, WALLS, FLOORS, ROOFS, STAIRS, FURRING, PIPE SPACES, COLUMN ENCLOSURES. ETC. THAT WOULD PERMIT PASSAGE OF FLAME, SMOKE, FUMES OR HOT GASES FROM ONE FLOOR TO ANOTHER SHALL BE PROPERLY FIRESTOPPED AS PER SUB-ART 13. MATERIALS ACCEPTABLE FOR FIRESTOPPING SHALL BE ROCKWOOL. MINERAL WOOL. NON-COMBUSTIBLE MATERIAL, SHEET METAL .022 THICK (MIN.), GYPSUM BOARD

8. INTERIOR FINISHES TO HAVE FLAME SPREAD RATINGS AS PRESCRIBED IN ASTM E-84-1961 'STANDARD METHOD TEST FOR SURFACE BURNING CHARACTERISTICS OF BUILDING MATERIALS'.

9. ALL SPACES OCCUPIED AS INDICATED ON PLAN. 10. ALL EXIT DOORS TO BE NON-COMBUSTIBLE

11. SUSPENDED CEILING CONSTRUCTION SHALL COMPLY WITH THE IRC & MASSACHUSETTS BUILDING CODE

12 ALL FIRE RATED DOORS SHALL BE 3'-0" X 7'-0" MINIMUM AND SHALL BEAR THE LABEL OF THE BOARD OF STANDARD AND APPEALS OR THE M.E.A. DIVISION.

GENERAL PROJECT NOTES

1. ALL WORK SHALL CONFORM TO THE REQUIREMENTS OF THE STATE OF MASSACHUSETTS AND CITY OF BOSTON , FIRE DEPT. REGULATIONS, UTILITY CO. REQUIREMENTS, AND THE BEST TRADE PRACTICES.

BEFORE COMMENCING WORK. THE CONTRACTOR SHALL FILE ALL REQUIRED CERTIFICATES OF INSURANCE WITH THE DEPARTMENT OF BUILDINGS, OBTAIN ALL REQUIRED PERMITS. AND PAY ALL FEES REQUIRED BY GOVERNING CITY OF BOSTON

IN THE FIELD PRIOR TO COMMENCING WORK, AND SHALL REPORT ANY DISCREPANCIES BETWEEN THE DRAWINGS AND

THE FIELD CONDITIONS TO THE ARCHITECT. 4. MINOR DETAILS NOT USUALLY SHOWN OR SPECIFIED BUT NECESSARY FOR PROPER CONSTRUCTION OF ANY PART OF

5. THE CONTRACTOR SHALL COORDINATE ALL WORK PROCEDURES WITH THE REQUIREMENTS OF LOCAL AUTHORITIES AND BUILDING MANAGEMENT.

6. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE PROTECTION OF ALL CONDITIONS AND MATERIALS WITHIN THE PROPOSED CONSTRUCTION AREA. THE CONTRACTOR SHALL DESIGN AND INSTALL ADEQUATE SHORING AND BRACING FOR ALL STRUCTURAL OR REMOVAL TASKS. THE CONTRACTOR SHALL HAVE SOLE RESPONSIBILITY FOR ANY DAMAGE OR INJURIES CAUSED BY OR DURING THE EXECUTION OF THE

7. THE CONTRACTOR SHALL LAY OUT HIS OWN WORK AND SHALL PROVIDE ALL DIMENSIONS REQUIRED FOR OTHER TRADES (PLUMBING, ELECTRICAL, ETC.).

8. PLUMBING AND ELECTRICAL WORK SHALL BE PERFORMED BY PERSONS LICENSED IN THEIR TRADES, WHO SHALL ARRANGE FOR AND OBTAIN INSPECTIONS AND REQUIRED

9. THE CONTRACTOR SHALL DO ALL CUTTING, PATCHING REPAIRING AS REQUIRED TO PERFORM ALL OF THE WORK INDICATED ON THE DRAWINGS, AND ALL OTHER WORK THAT MAY BE REQUIRED TO COMPLETE THE JOB.

10. THE CONTRACTOR, UPON COMPLETION OF THE WORK, SHALL APPLY FOR DEPARTMENT OF BUILDINGS INSPECTIONS

CONSTRUCTION NOTES

TENANTS SAFETY PLAN

STRUCTURAL WORK IS INVOLVED.

HAVING JURISDICTION.

TOOLS, ETC.

CONTRACTOR.

ACCUMULATION.

BUILDING.

M-F, EXCEPT LEGAL HOLIDAYS.

TO OTHER TENANTS OF THE BUILDING.

COURSE OF CONSTRUCTION WORK.

1. GENERAL: ALL WORK TO BE DONE IN ACCORDANCE WITH

THE CITY OF BOSTON AND THE STATE OF MASSACHUSETTS

BUILDING CODE, AND REGULATIONS OF ALL OTHER AGENCIES

STRUCTURAL: CONTRACTOR TO PROVIDE ADEQUATE

PERSONS IN THE BUILDING SHALL BE MAINTAINED CLEAR &

FREE OF ALL OBSTRUCTIONS SUCH AS BUILDING MATERIALS.

CONSTRUCTION AREA AND/OR IN ANY AREA OF THE BUILDING

DUST CONTROL: DEBRIS, DIRT, AND DUST TO BE KEPT TO A

CONSTRUCTION AREA; AND TO BE CLEANED UP AND CLEARED

FROM THE BUILDING PERIODICALLY TO AVOID ANY EXCESSIVE

6. NOISE AFTER HOURS: CONSTRUCTION OPERATIONS WILL BE

LIMITED TO NORMAL WORKING HOURS, TYPICALLY 8AM TO 5PM

PROPOSED CONSTRUCTION FLOOR. CONTRACTOR WILL LIMIT

INCONVENIENCES CREATED TO ALL OTHER AREAS OF THE

THERE WILL BE NO ONE OCCUPYING THE PROPOSED

CONSTRUCTION FLOOR TO BE RENOVATED DURING THE

TO A MINIMUM THE AMOUNT OF DUST, DIRT OR OTHER SUCH

. FIRE SAFETY: ALL BUILDING MATERIALS STORED AT

ARE TO BE SECURED IN A LOCKED AREA. ACCESS TO SUCH

AREAS TO BE CONTROLLED BY OWNER AND/OR GENERAL

MINIMUM, AND TO BE CONFINED TO THE IMMEDIATE

MEANS OF EGRESS: ALL EXISTING MEANS OF EGRESS FOR

TEMPORARY BRACING AND SHORING WHEREVER ANY

ALL WALL TYPES ARE AS LISTED

TAPED AND SPACKLED.

2. ALL DIMENSIONS GIVEN ARE TO FACE OF GYPSUM BOARD UNLESS OTHERWISE NOTED.

3. PARTITIONS SHOWN ALIGNED WITH BASE BUILDING STRUCTURE SHALL BE FLUSH AND SMOOTH WITH BASE BUILDING STRUCTURE UNLESS OTHERWISE NOTED. ALL EXISTING CORNER BEADS SHALL BE REMOVED AND JOINTS

4. CONTRACTOR SHALL FIELD VERIFY ALL DIMENSIONS AND CONDITIONS SHOWN ON DRAWINGS AND SHALL NOTIFY ARCHITECT OF ANY DISCREPANCIES, OMISSIONS AND/OR CONFLICTS BEFORE PROCEEDING WITH THE WORK.

FRAMING OF ALL OPENINGS FOR DUCT WORK, RETURN AIR OPENINGS AND GRILLE OPENINGS ABOVE AND BELOW SUSPENDED CEILINGS SHALL BE COORDINATED WITH HVAC SHOP DRAWINGS. ALL OPENINGS SHALL BE PROPERLY SEALED FOR SOUND AND VIBRATION CONTROL.

6. WHERE DUCTS, PIPES OR CABLES PENETRATE RATED PARTITIONS, PROVIDE FIRESTOP MATERIAL TO INSURE CONTINUITY OF RATING.

REFERENCE DOOR SCHEDULE FOR DOOR TYPES AND

8. DETAILED DOOR AND HARDWARE SCHEDULES SHALL BE SUBMITTED TO THE ARCHITECT FOR APPROVAL. FABRICATION 7. CONSTRUCTION OPERATIONS WILL NOT INVOLVE OF MATERIAL SHALL NOT BEGIN UNTIL SUCH APPROVALS HAVE INTERRUPTION OF HEATING, WATER, OR ELECTRICAL SERVICES

9. ALL DOORS IN DRYWALL PARTITION SHALL BE SET 4" FROM 8. CONSTRUCTION WORK WILL BE CONFINED TO THE CLEAR OPENING OF FRAME TO IMMEDIATE ADJACENT WALL, UNLESS OTHERWISE NOTED.

10. ALL DOORS SHALL BE UNDERCUT, TO CLEAR FINISH FLOOR OR THRESHOLD BY 1/4", UNLESS OTHERWISE NOTED.

11. THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATEDLY IF HE CANNOT COMPLY WITH ALL REQUIREMENTS. DO NOT SCALE DRAWINGS: DIMENSIONS GOVERN. LARGER SCALE DRAWINGS SHALL GOVERN OVER SMALLER SCALE DRAWINGS.

12. CONTRACTORS MUST COMPLY WITH THE RULES AND REGULATIONS OF AGENCIES HAVING JURISDICTION.

13. THE CONTRACTOR SHALL MAINTAIN A CURRENT AND COMPLETE SET OF CONSTRUCTION DOCUMENTS ON THE CONSTRUCTION FLOORS DURING ALL PHASES OF CONSTRUCTION FOR USE BY ALL TRADES.

NICHES, CORRIDORS, ETC. DIMENSIONS INDICATED MUST BE MAINTAINED. 15. CONTRACTOR SHALL COMPLY WITH ALL BASE BUILDING

14. WHERE CLEAR DIMENSIONS ARE INDICATED FOR FILE

STANDARDS FOR ALTERATIONS ESTABLISHED BY BUILDING MANAGEMENT. 16. CONTRACTOR SHALL PROVIDE ACCESS PANELS AS

REQUIRED FOR ALL EXISTING HEATING SHUT OFF VALVES IN GYP. BD. WALLS OR NEW RADIATOR COVERS WHERE

DEMOLITION NOTES

1. CONTRACTOR SHALL PERFORM ALL OPERATIONS OF DEMOLITION AND REMOVAL INDICATED ON THE DRAWINGS AND AS MAY BE REQUIRED BY THE WORK. ALL WORK SHALL BE DONE CAREFULLY AND NEATLY, IN A SYSTEMATIC MANNER.

2. ALL EXISTING SURFACES AND EQUIPMENT TO REMAIN SHALL BE FULLY PROTECTED FROM DAMAGE. THE THE CONTRACTOR SHALL VERIFY ALL EXISTING CONDITIONS CONTRACTOR SHALL ASSUME FULL RESPONSIBILITY FOR DAMAGE AND SHALL MAKE REPAIRS WITHOUT ADDITIONAL COST TO THE OWNER.

3. NO DEBRIS SHALL BE ALLOWED TO ACCUMULATE ON THE SITE. DEBRIS SHALL BE REMOVED BY THE CONTRACTOR AS THE JOB PROCEEDS. THE SITE SHALL BE LEFT BROOM CLEAN THE WORK SHALL BE INCLUDED AS IF THEY WERE INDICATED IN AT THE COMPLETION OF DEMOLITION.

> 4. NO STRUCTURAL ELEMENTS SHALL BE REMOVED UNLESS PORTIONS AFFECTED ARE ADEQUATELY SUPPORTED EITHER BY TEMPORARY SHORING OR NEW STRUCTURAL ELEMENTS AS REQUIRED TO PROTECT THE STABILITY AND INTEGRITY OF THE EXISTING STRUCTURE.


> 5. REMOVE OR RELOCATE ALL WIRING, PLUMBING, AND MECHANICAL EQUIPMENT AFFECTED BY REMOVAL OF PARTITIONS. REMOVED PIPES AND/OR LINES SHALL BE CUT TO A POINT OF CONCEALMENT BEHIND OR BELOW FINISH SURFACES, AND SHALL BE PROPERLY CAPPED OR PLUGGED.

> 6. THE CONTRACTOR SHALL PROVIDE, ERECT, AND MAINTAIN ALL TEMPORARY BARRIERS, GUARDS, AND ALL TEMPORARY SHORING AND BRACING AS REQUIRED BY DEPT. OF BUILDINGS RULES AND REGULATIONS.

7. THE CONTRACTOR SHALL PROVIDE ADEQUATE WEATHER PROTECTION FOR THE BUILDING AND ITS CONTENTS DURING THE COURSE OF THE WORK. ALL OPENINGS IN ANY WALL OR ROOF SHALL BE PROTECTED FROM ALL FORMS OF WEATHER OR WATER PENETRATION.

8. THE CONTRACTOR SHALL FILE ALL NECESSARY CERTIFICATES OF INSURANCE WITH THE DEPT. OF BUILDINGS, PAY ALL FEES. OBTAIN ALL PERMITS. AND PROVIDE ANY AND ALL BONDS REQUIRED BY ANY CITY AGENCY IN ORDER TO DO THE WORK HEREIN DESCRIBED.

FILING/INDEXES

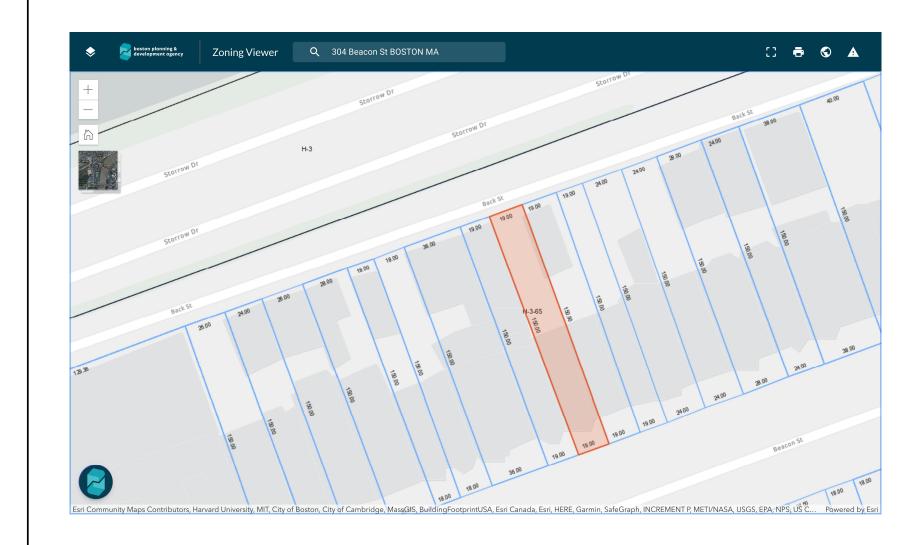

G.I.S OF PROPOSED

ZONING NOTES - SEE Z001

304 BEACON ST, UNIT 1 BOSTON MA 02116

SEE DRAWING Z001 FOR FULL ZONING ANALYSIS & SUMMARY

SHEET INDEX

NO TITLE

T-001.00 TITLE PAGE, GIS LOCATION, DRAWING INDEX, PROJECT NOTES Z-001.00 ZONING NOTES AND SUMMARY

EX-101.00 EXISTING PLANS AND AREAS OF WORK

EX-301.00 EXISTING EXTERIOR ELEVATIONS AND AREAS OF WORK

A-101.00 GARDEN AND PARLOR FLOOR PLANS

A-301.00 EXTERIOR ELEVATIONS A-302.00 CONTEXTUAL REAR EXTERIOR ELEVATIONS

REYNOLDS RESIDENCE

John Buckley Architecture & Desigr

46 Waltham St. Studio 101

Boston MA, 02118

373 Broadway, Stte F1

New York NY, 10013

304 BEACON ST UNIT BOSTON MA 02116


ISSUE / REV NO DATE

BACKBAY HISTORIC COMMISSION

REYNOLDS RESIDENCE 304 BEACON ST UNIT BOSTON MA 02116

09.21.21


TITLE PAGE

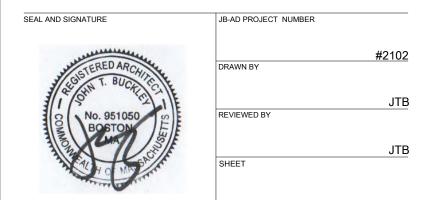

ON ZONING ORDINANCE REFERENCED DEFINITIONS	BOSTON ZONING ORDINANCE REFERENCED ARTICLES														ZONING SUMMARY & BZA DIMENSION	
	SECTION 13-5	5													ZONING NOTES	
	TABLE I	B - DIMENSION	AL REGUL	LATIONS											304 BEACON ST UNIT 1 BOSTON MA 02116	
														PARCEL ID: 0503280002 ZONE: H-3-65 STATE CLASS CODE: 102		
	DISTRICT	TYPE OF USE	LOT SIZE minimum			FLOOR AREA		OF BUILDINGS	USABLE OPEN	FRONT YARD	SIDE YARD	REAR YARD	SETBACK OF	REAR YARD		SIDENTIAL RESIDENTIAL (NO CHANGE)
	_		sq. ft.	sq. ft. for each add'l	minimun I feet	n RATIO maximum		feet	SPACE minimum	minimum depth	minimum width feet			maximum % occup.	MAX FAR: LOT AREA:	
	-			dwell. unit		(1)			sq. ft. per dwell.	feet ⁽¹⁴⁾		feet	distance from lot		ALLOWABLE FAR: EXISTING FAR: PROPOSED FAR:	3.0 (LOT AREA) 2850 S.F. (19'x150') 8550 S.F. 4735 S.F (CONFORMING) 4824 S.F (CONFORMING)
									unit				line	buildings	EXISTING S.F. BASEMENT / GARDEN FLO	
	H-3-65	Any dwelling	none	none	none	3.0	-	65(9)	50	(10)	(4)	25% of lot depth	H <u>+</u> L ¹ (9)	40	1ST FLOOR: 2ND FLOOR: 3RD FLOOR:	OR: 1284 S.F. 1061 S.F. 1195 S.F. 1194 S.F. 4735 S.F. (CONFORMING)
		Other use	none	none	none	3.0	-	65(9)	none	(10)	(4)	all uses	all uses	40	TOTAL S.F.:	
	H-3	Any dwelling	none	none	none	3.0	none	none ⁽¹⁵⁾	100	15	(4)	10 + L_(6)	H <u>+</u> L ¹	35	PROPOSED S.F. BASEMENT / GARDEN FLOM 1ST FLOOR: 2ND FLOOR:	1104 S F
		Other use	none	none	none	3.0	none	none (15)	none	15	(4)	20	all uses	35	3RD FLOOR: TOTAL S.F.:	1195 S.F. (NO CHANGE) 1195 S.F. (NO CHANGE) 4824 S.F. (CONFORMING)
	H-4	Any dwelling	none	none	none	4.0	none	none	50	15	(4)	10 + L ₋ (6)		40	NOTE: NO CHANGE IN USE UNDEI CHANGE IN NUMBER OF D	WELLING UNITS
		Other use	none	none	none	4.0	none	none	none	15	(4)	20	(6) all uses	40	CHANGE IN BULK TO BUILE	DING
	H-5	Any dwelling	none	none	none	5.0	none	none ^{(13),}	50	15	(4)	10 + L ₋ (6)	H <u>+</u> L ¹	40		
								(15)	-			20	6 all uses			

AL FORM


REYNOLDS RESIDENCE 304 BEACON ST UNIT1 BOSTON MA 02116

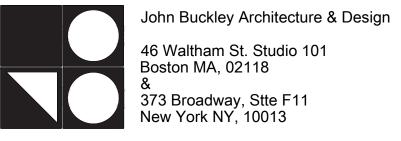



CONSULTANTS / CONTRACTOR

REYNOLDS RESIDENCE 304 BEACON ST UNIT 1 BOSTON MA 02116

ZONING ANALYSIS

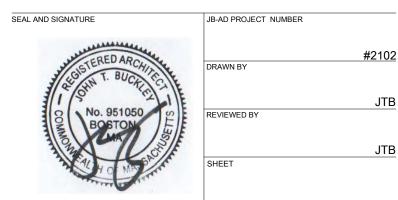


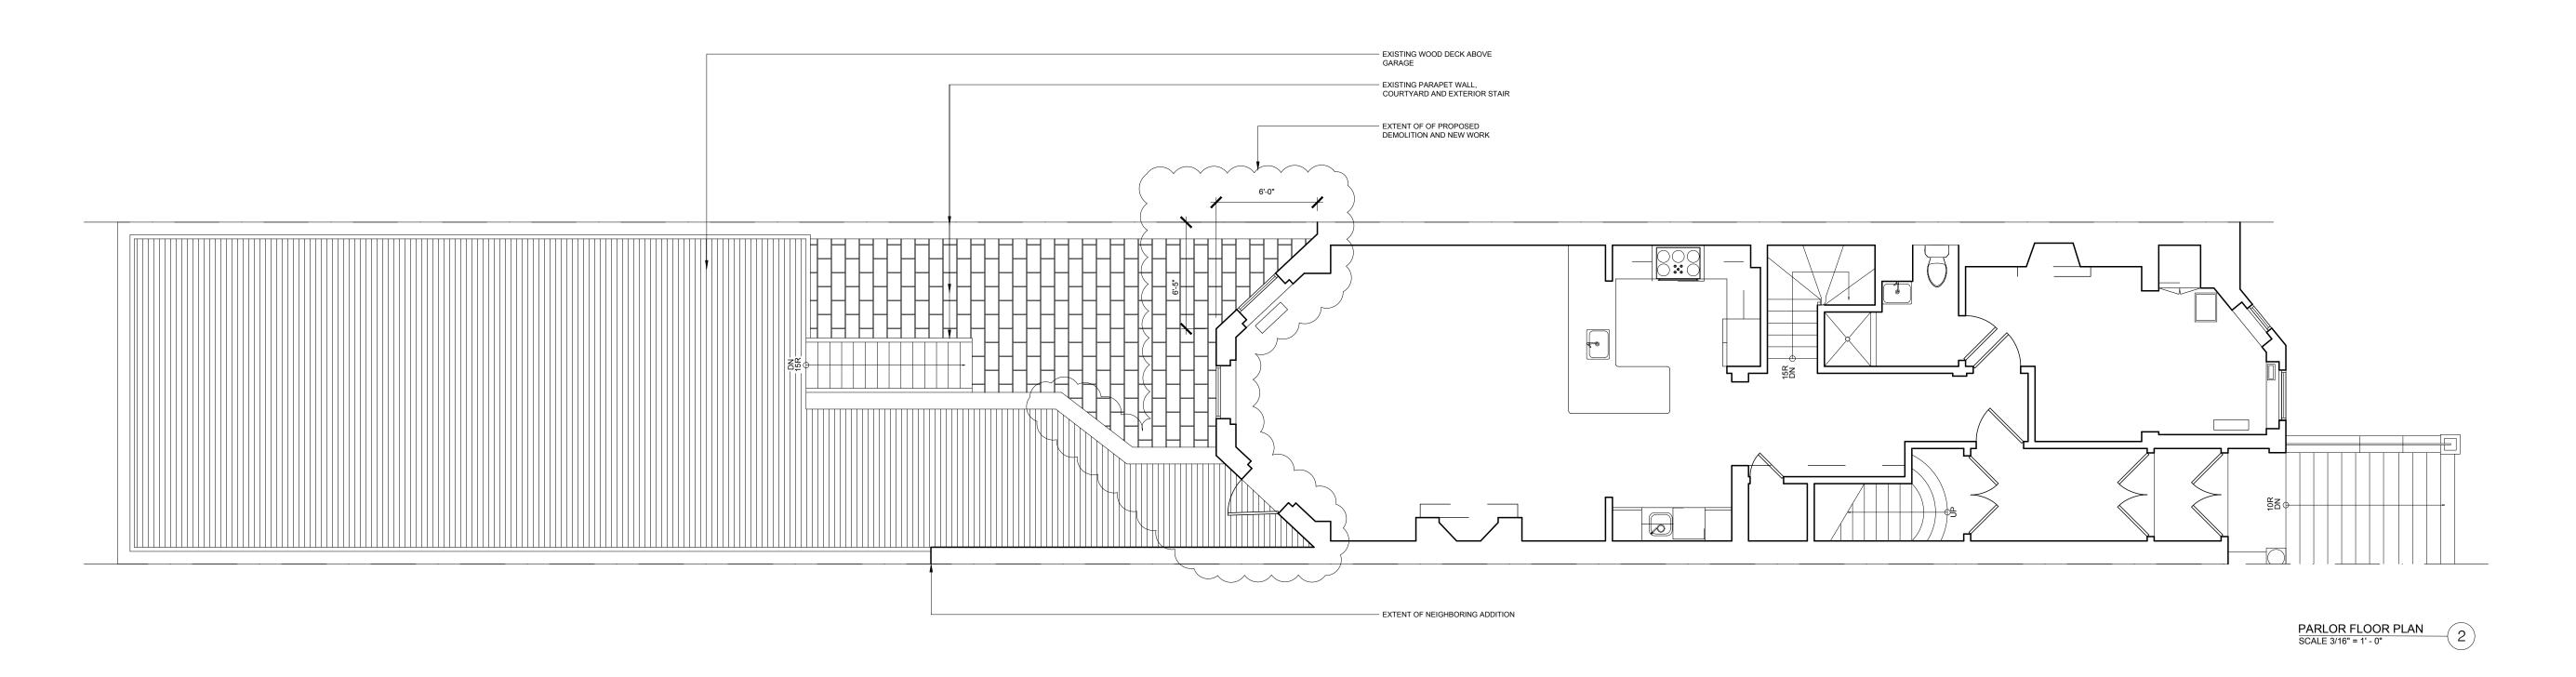

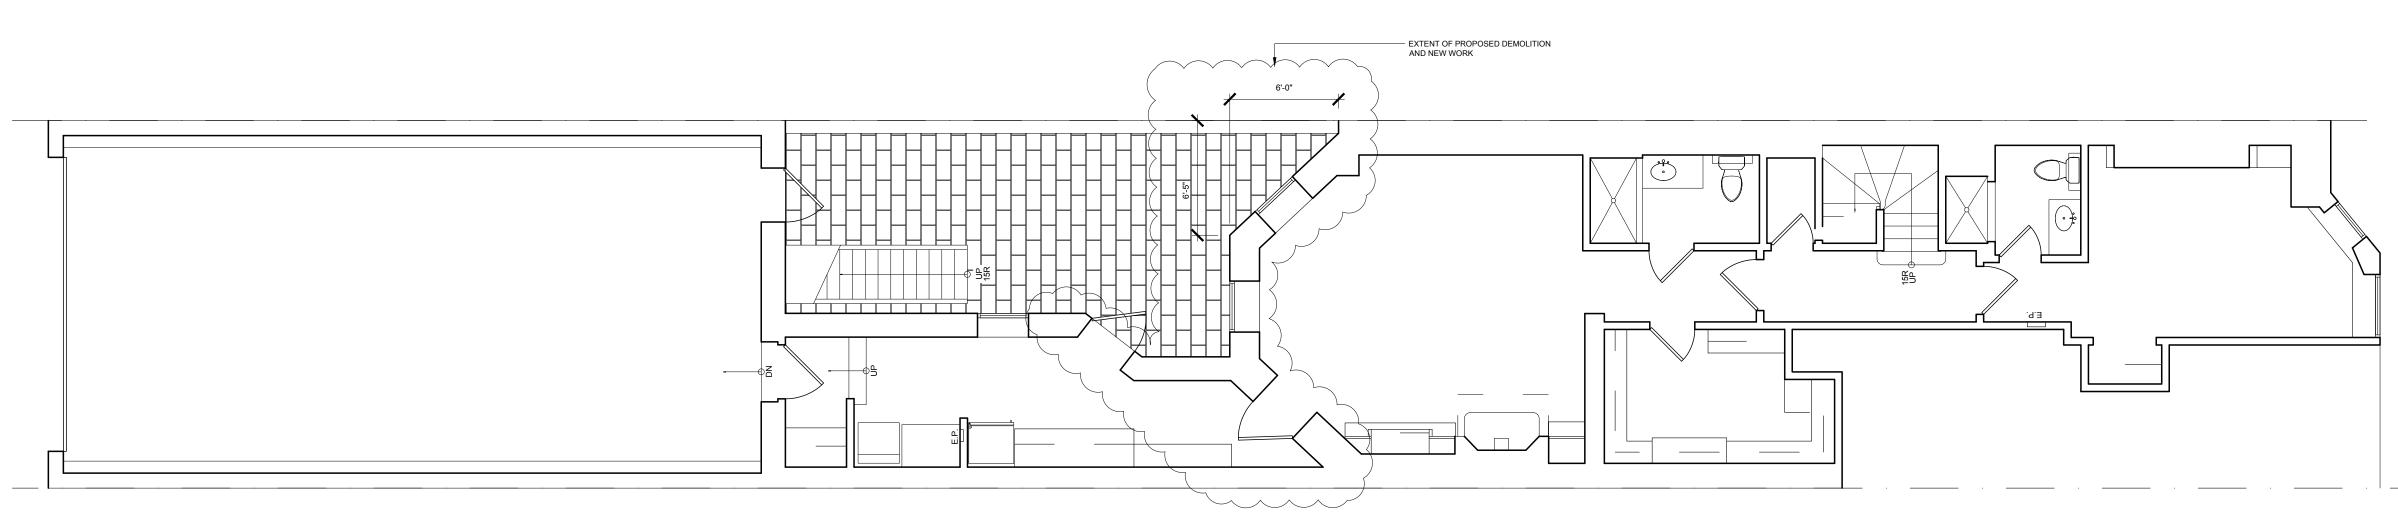


GARDEN FLOOR PLAN SCALE 3/16" = 1' - 0"

REYNOLDS RESIDENCE 304 BEACON ST UNIT1 BOSTON MA 02116

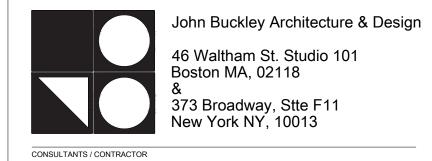

REYNOLDS RESIDENCE 304 BEACON ST UNIT 1 BOSTON MA 02116


EXISTING PLAN 1ST & 2ND FLOORS

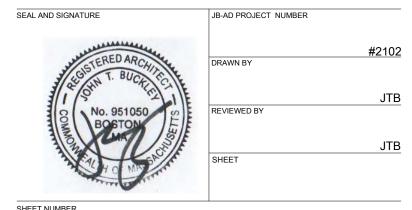

EX101.00

- BROWNSTONE HEADER AND BLUESTONE SILL TYPICAL - WINDOW OPENING OTHERWISE
UNADORNED

EXISTING REAR FACADE AT SECTION THRU GARDEN 3

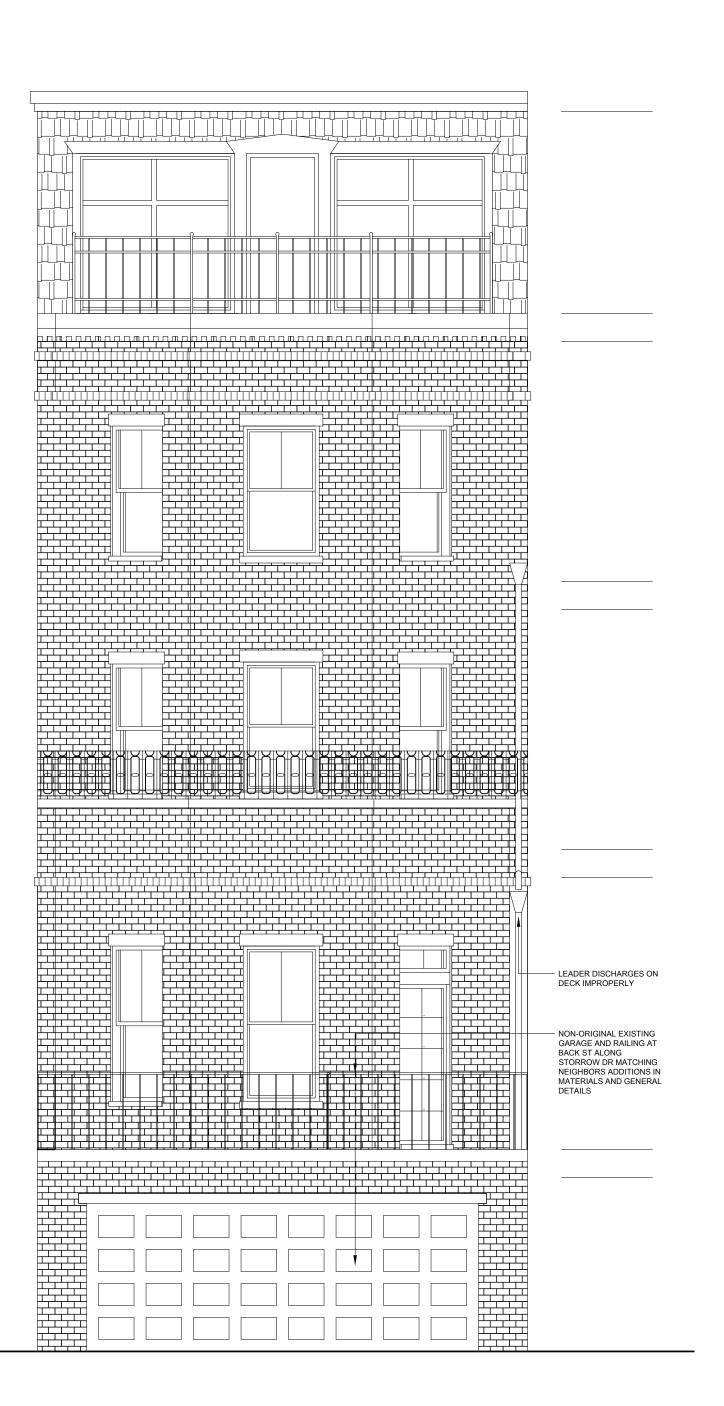




NOTE:

NO WORK PROPOSED AT

EXISTING REAR FACADE AT BACK STREET
SCALE 1/4" = 1' - 0"

EXISTING FRONT FACADE AT BEACON ST
SCALE 1/4" = 1' - 0"

REYNOLDS RESIDENCE 304 BEACON ST UNIT1 BOSTON MA 02116

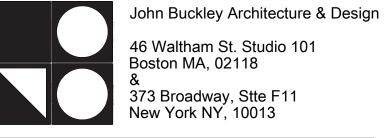

CONSULTANTS / CONTRACTOR

09.21.21 BACKBAY HISTORIC COMMISSION


REYNOLDS RESIDENCE 304 BEACON ST UNIT 1 BOSTON MA 02116


EXISTING EXTERIOR

ELEVATIONS




EX301.00

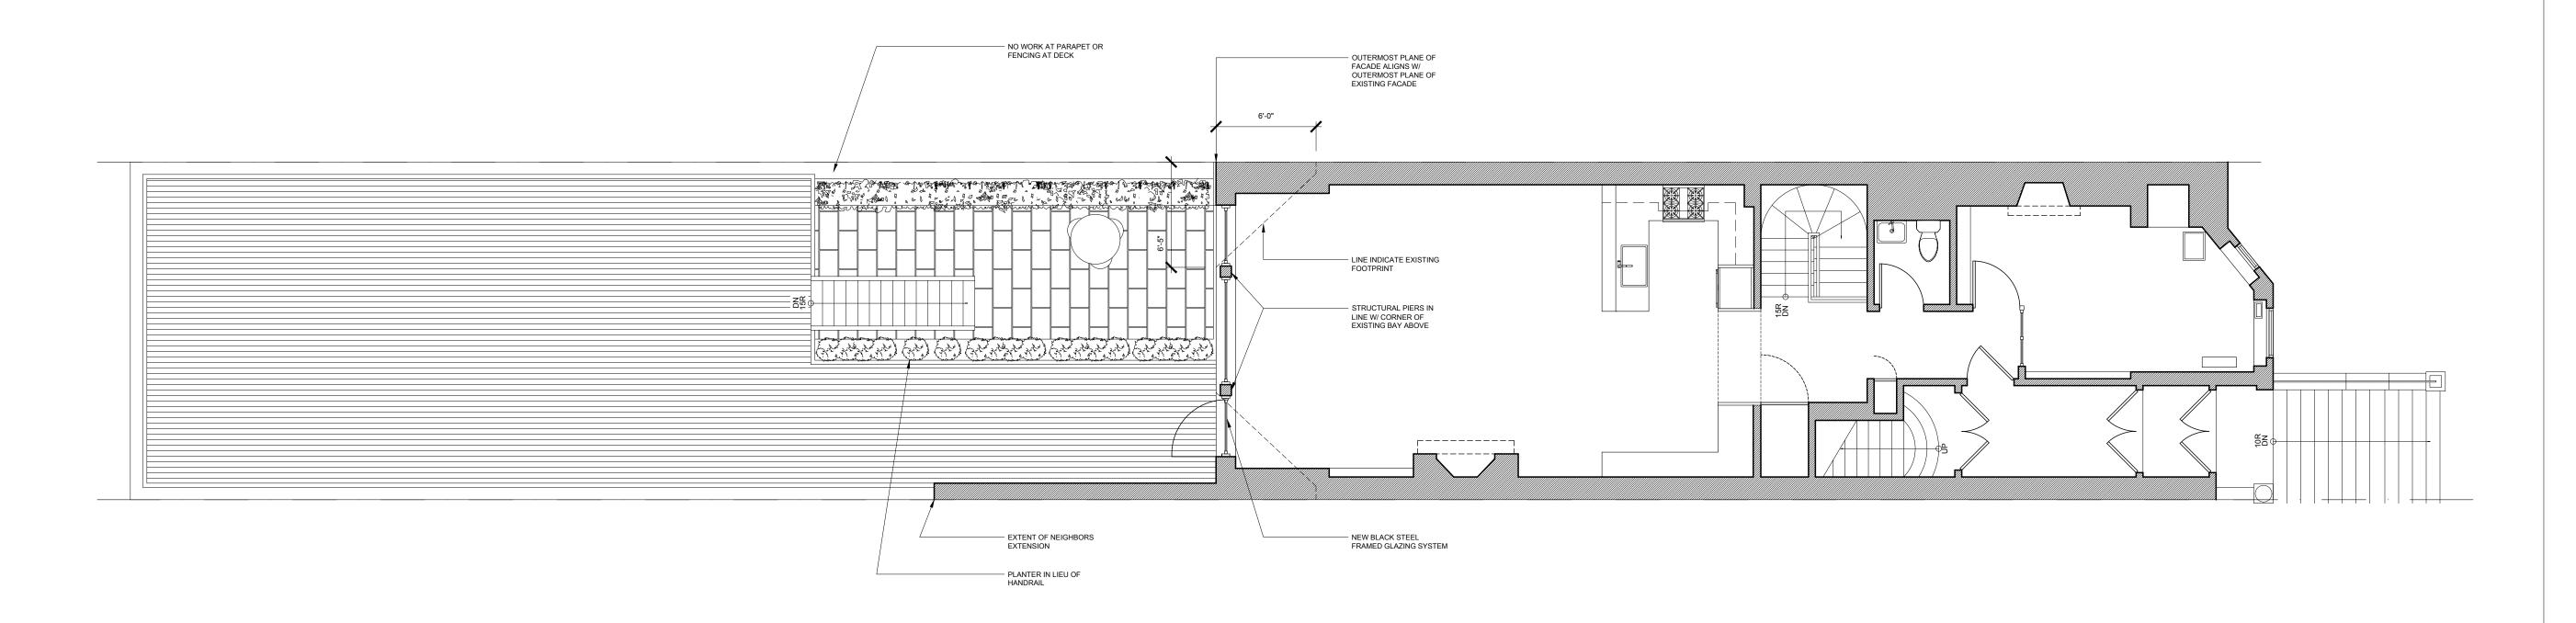

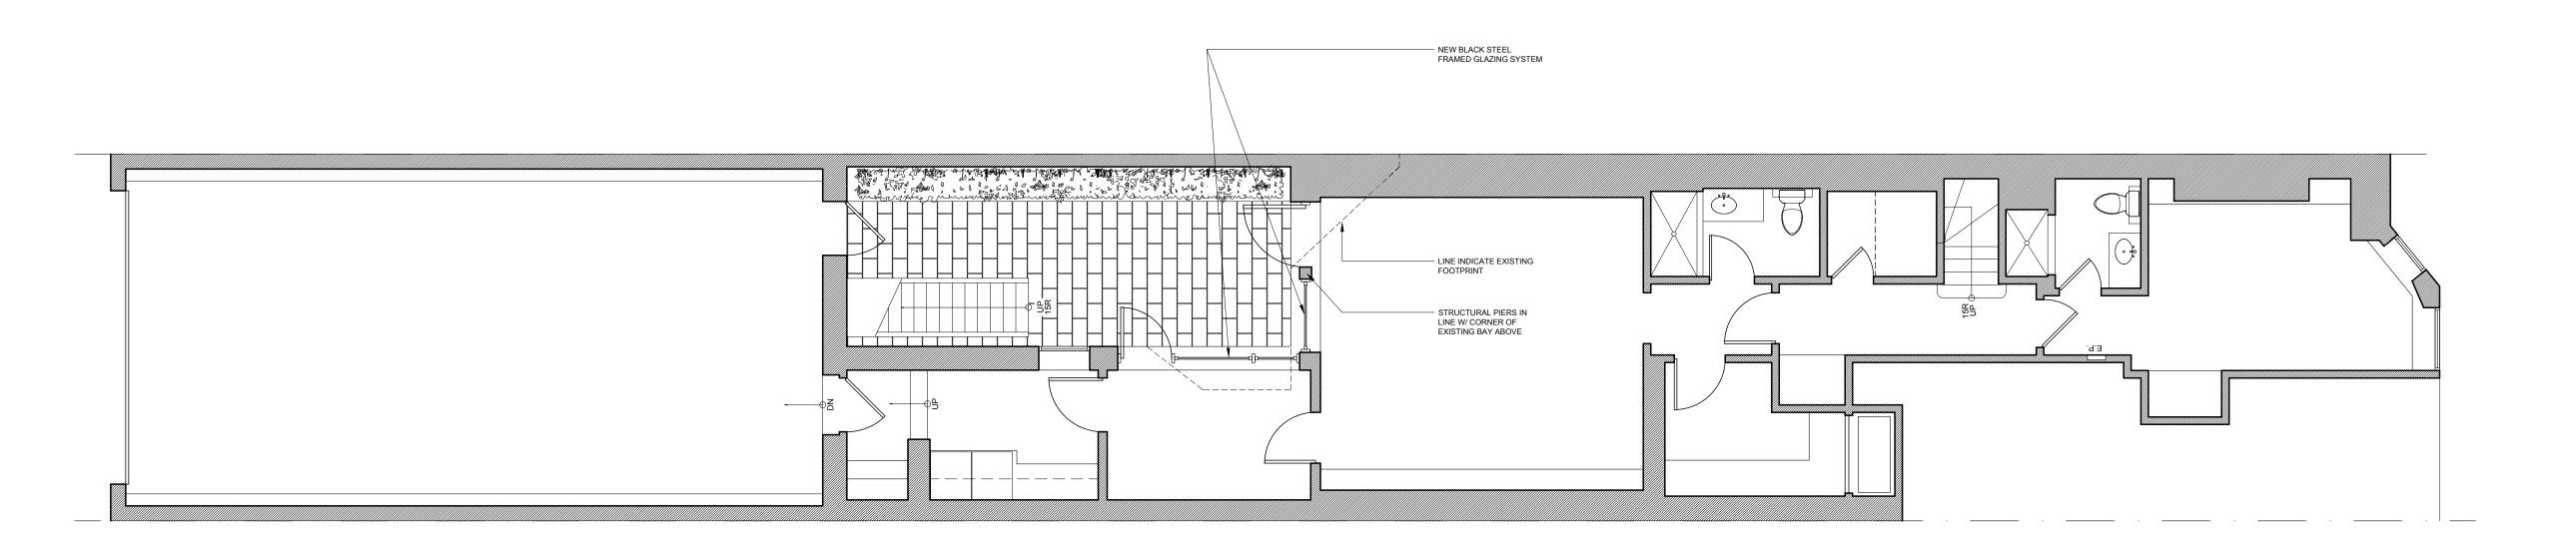

ENLARGED PLAN - KITCHEN SCALE 1/2" = 1' - 0"

REYNOLDS RESIDENCE 304 BEACON ST UNIT1 BOSTON MA 02116

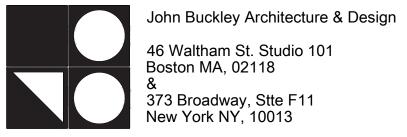


CONSULTANTS / CONTRACTOR


09.21.21 BACKBAY HISTORIC COMMISSION ISSUE / REV NO DATE

REYNOLDS RESIDENCE 304 BEACON ST UNIT 1 BOSTON MA 02116


PROPOSED 1ST & 2ND FLOOR PLANS

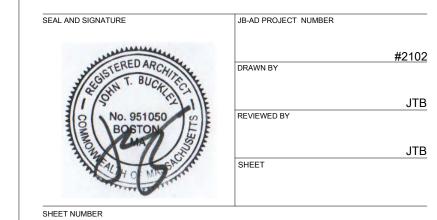


A101.00

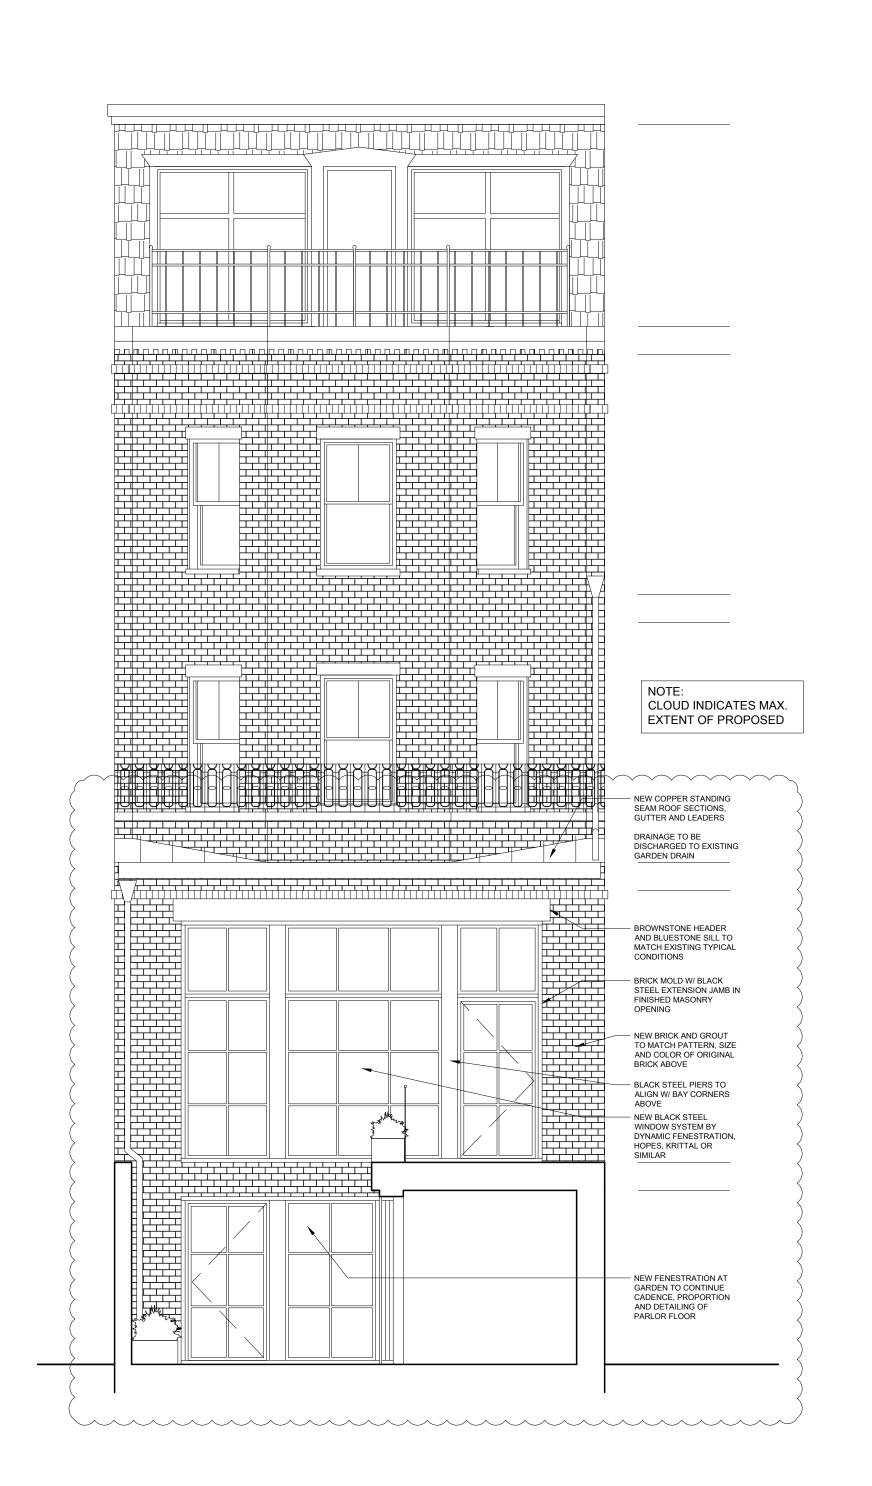

EXISTING REAR FACADE AT SECTION THRU GARDEN 3

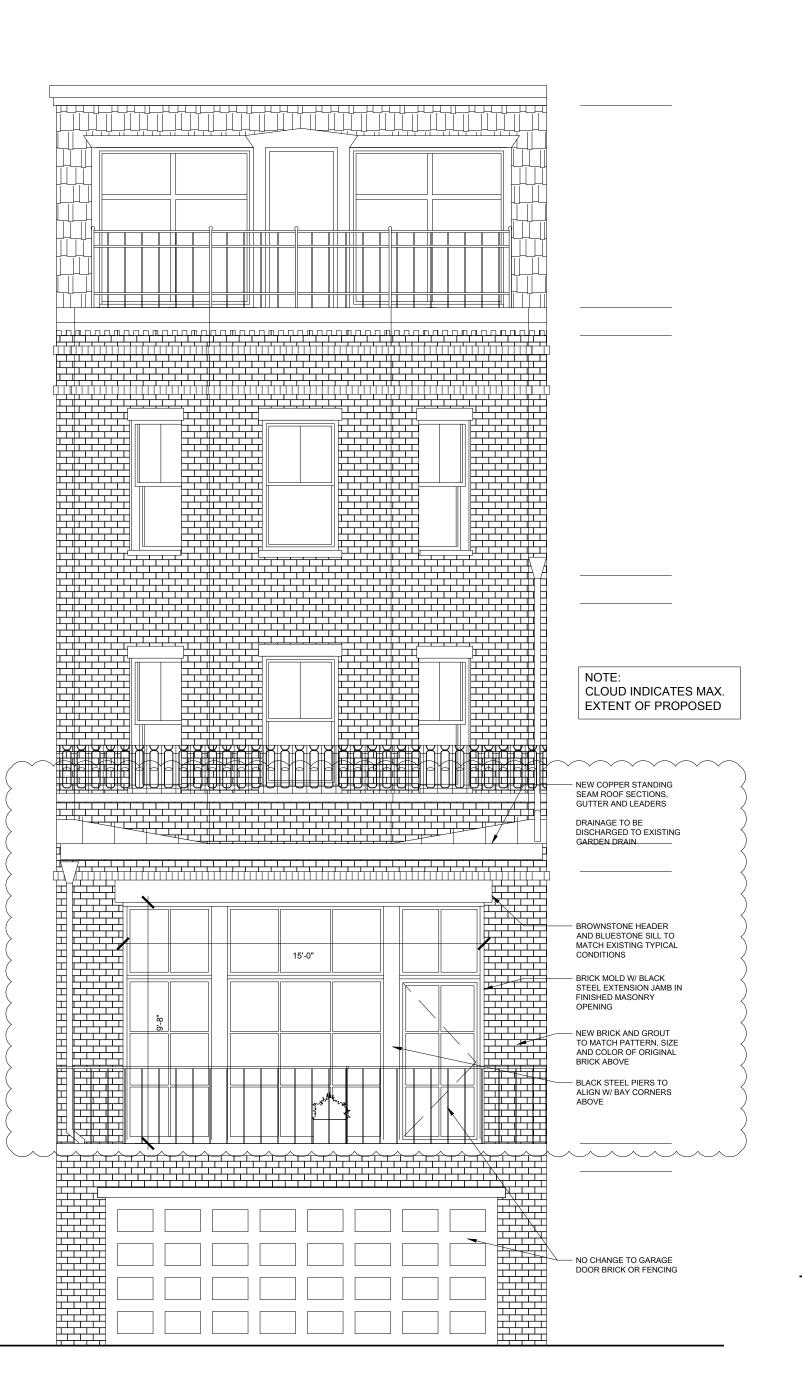

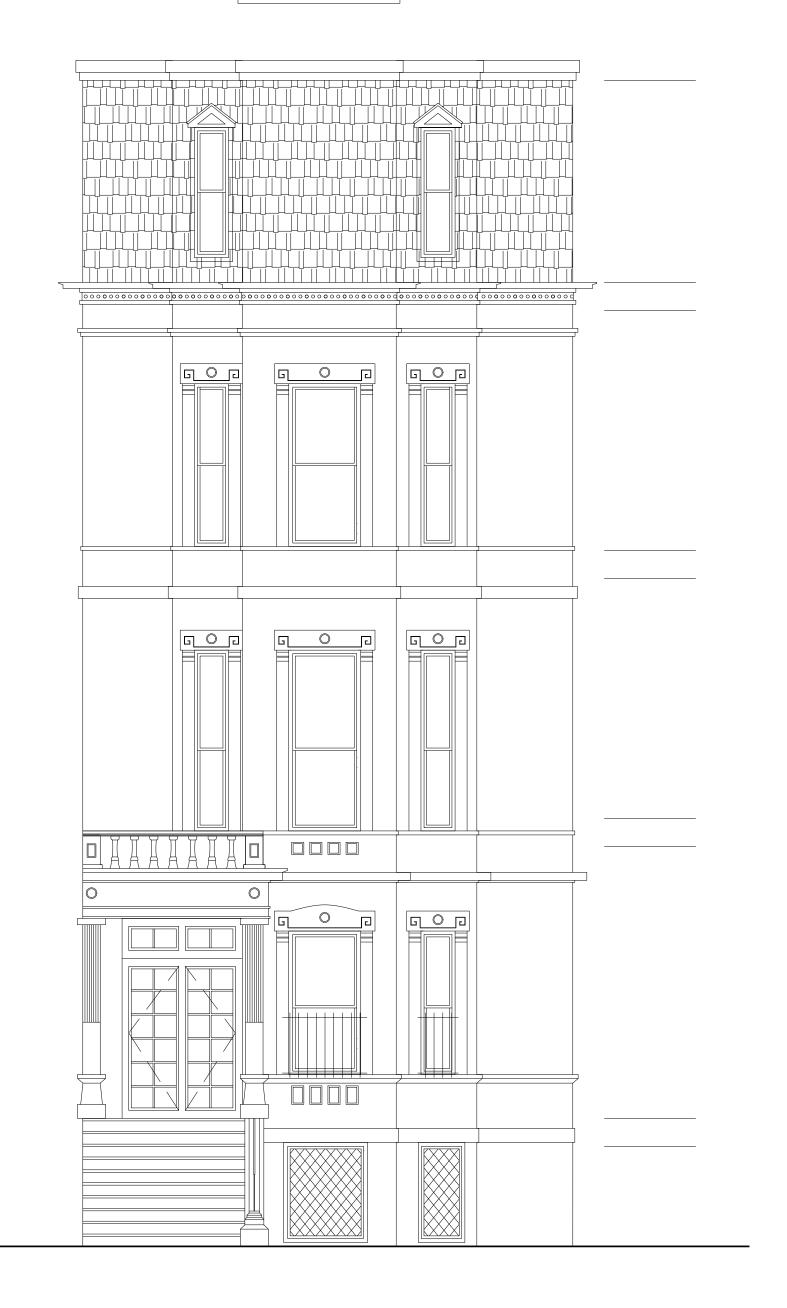

NOTE:


NO WORK PROPOSED AT

FRONT FACADE

EXISTING REAR FACADE AT STREET
SCALE 1/4" = 1' - 0"

EXISTING FRONT FACADE 1

REYNOLDS RESIDENCE 304 BEACON ST UNIT1 BOSTON MA 02116

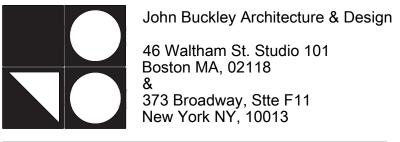


CONSULTANTS / CONTRACTOR

01 09.21.21 BACKBAY HISTORIC COMMISSION

ISSUE / REV NO DATE ISSUED TO

REYNOLDS RESIDENCE 304 BEACON ST UNIT 1 BOSTON MA 02116

PROPOSED REAR EXTERIOR ELEVATION

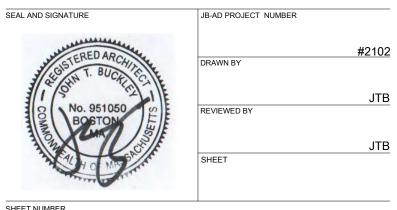


A301.00





REYNOLDS RESIDENCE 304 BEACON ST UNIT1 BOSTON MA 02116

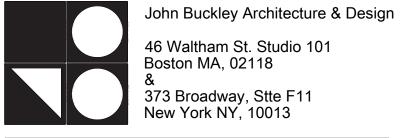

CONSULTANTS / CONTRACTOR

ISSUE / REV NO DATE

REYNOLDS RESIDENCE 304 BEACON ST UNIT 1 BOSTON MA 02116

NEIGHBORING BUILDING CONTEXTUAL EXTERIOR **ELEVATION**

