



# 17 Louisburg Square

## BHAC Submission

### SCOPE OF WORK

Note: All work shall be compliant with Beacon Hill Historic District Guidelines.

#### 1. FRONT ENTRY DOOR

Existing number, knocker, mail slot and kick plate to be polished, and reinstalled.  
Remove existing doorknob, locking cylinder and rosette.  
New door knob, locking cylinder, and rosette to be installed.  
New Intercom

#### 2. MUDROOM ENTRY DOOR

Install new Baldwin Baltimore mortise knob trim.





Existing Intercom



Existing Mudroom Door






1 EXISTING FRONT DOOR  
SCALE: 3/8" = 1'-0"



- HOUSE NUMBER TO BE REMOVED, POLISHED, AND REINSTALLED
- DOOR KNOCKER TO BE REMOVED, POLISHED, AND REINSTALLED
- NEW 2N IP VERSO LUXURIOUS MODULAR IP INTERCOM 9155101 W/ BRASS COVER
- NEW ER BUTLER ER SERIES COMPRESSION TYPE CYLINDER RING
- NEW ER BUTLER MORTISE LOCKS WITH MATCHING CYLINDER
- NEW ER BUTLER TRADITIONAL ER SERIES DOOR KNOBS AND ROSES
- EXISTING MAIL SLOT TO BE REMOVED, POLISHED, AND REINSTALLED
- EXISTING DOOR KICK PLATE TO BE REMOVED, POLISHED, AND REINSTALLED

2 PROPOSED FRONT DOOR  
SCALE: 3/8" = 1'-0"





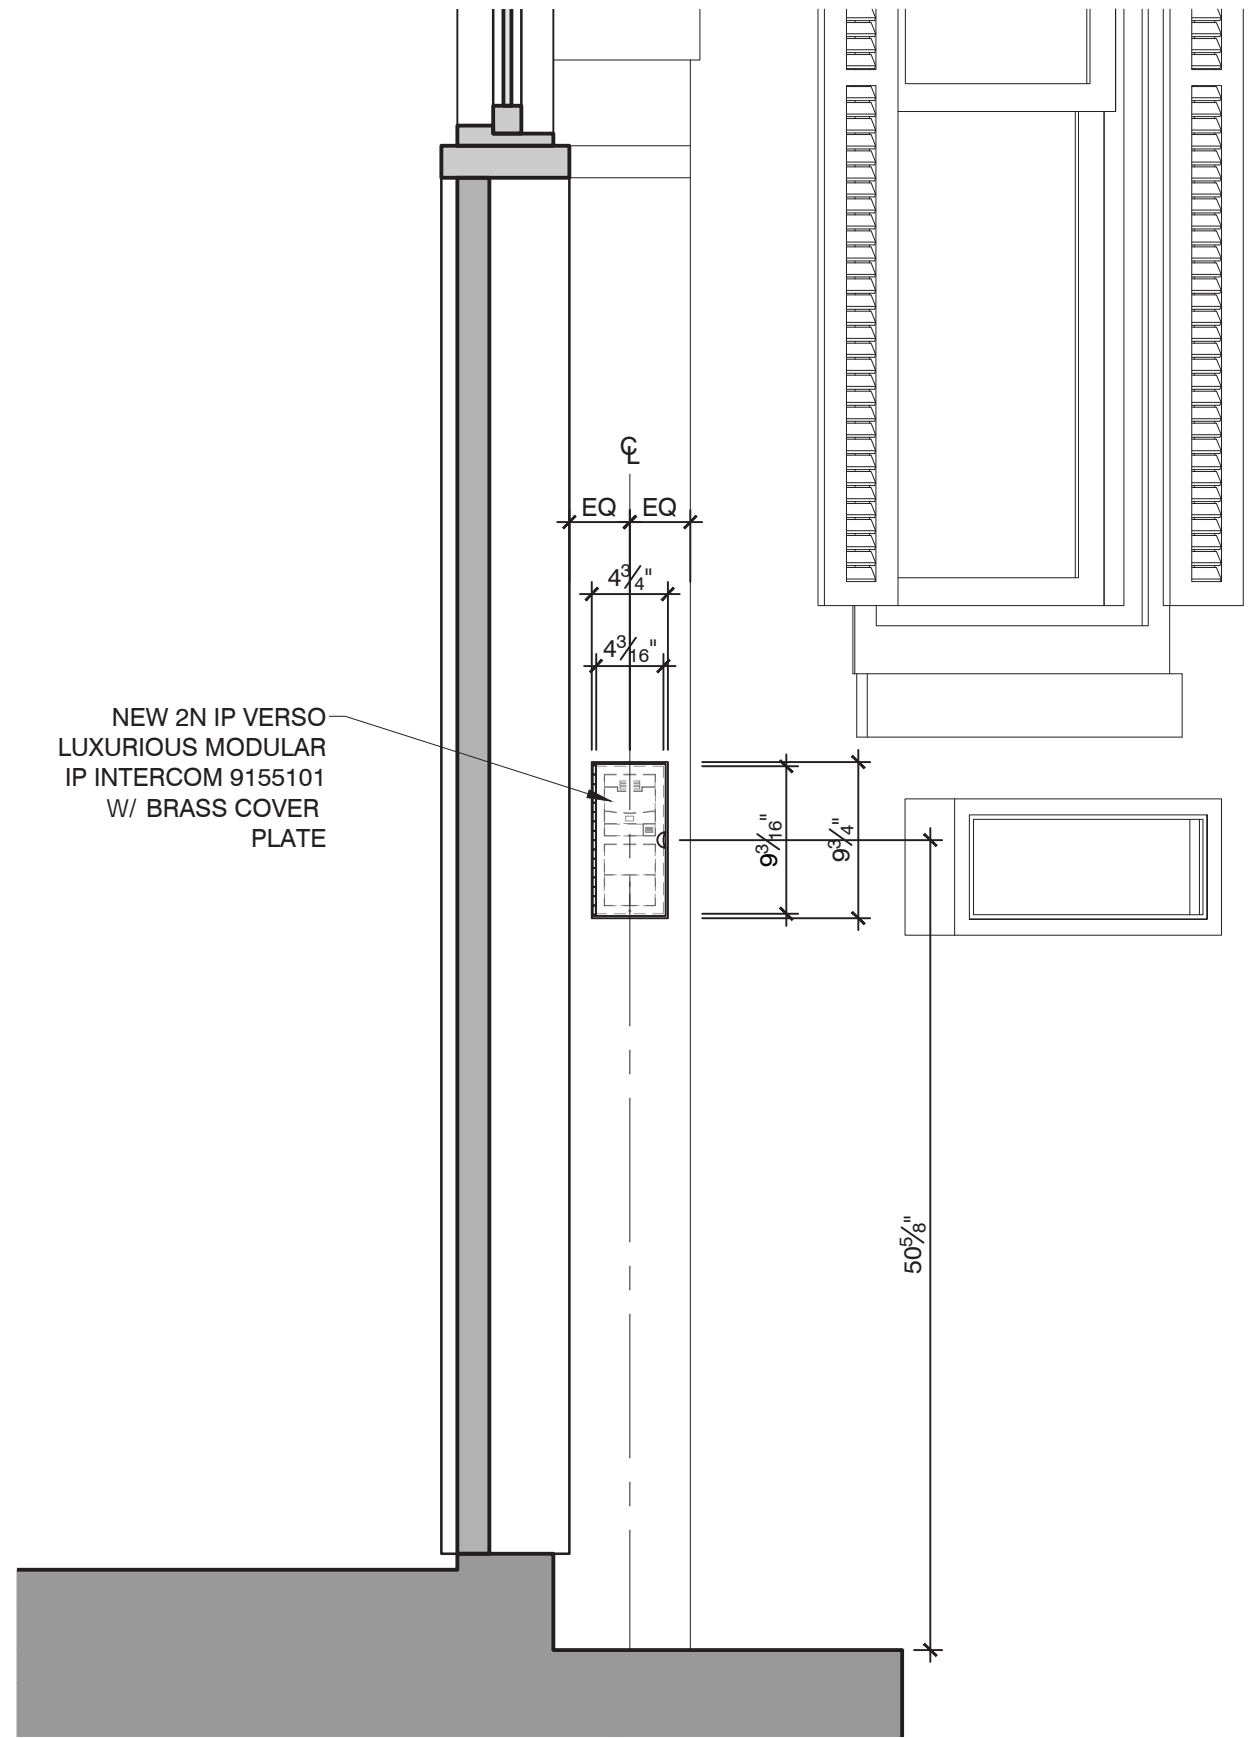





NEW 2N IP VERSO  
LUXURIOUS MODULAR  
IP INTERCOM 9155101  
W/ BRASS COVER  
PLATE

1 PROPOSED FRONT DOOR SIDE ELEVATION  
SCALE: 1" = 1'-0"



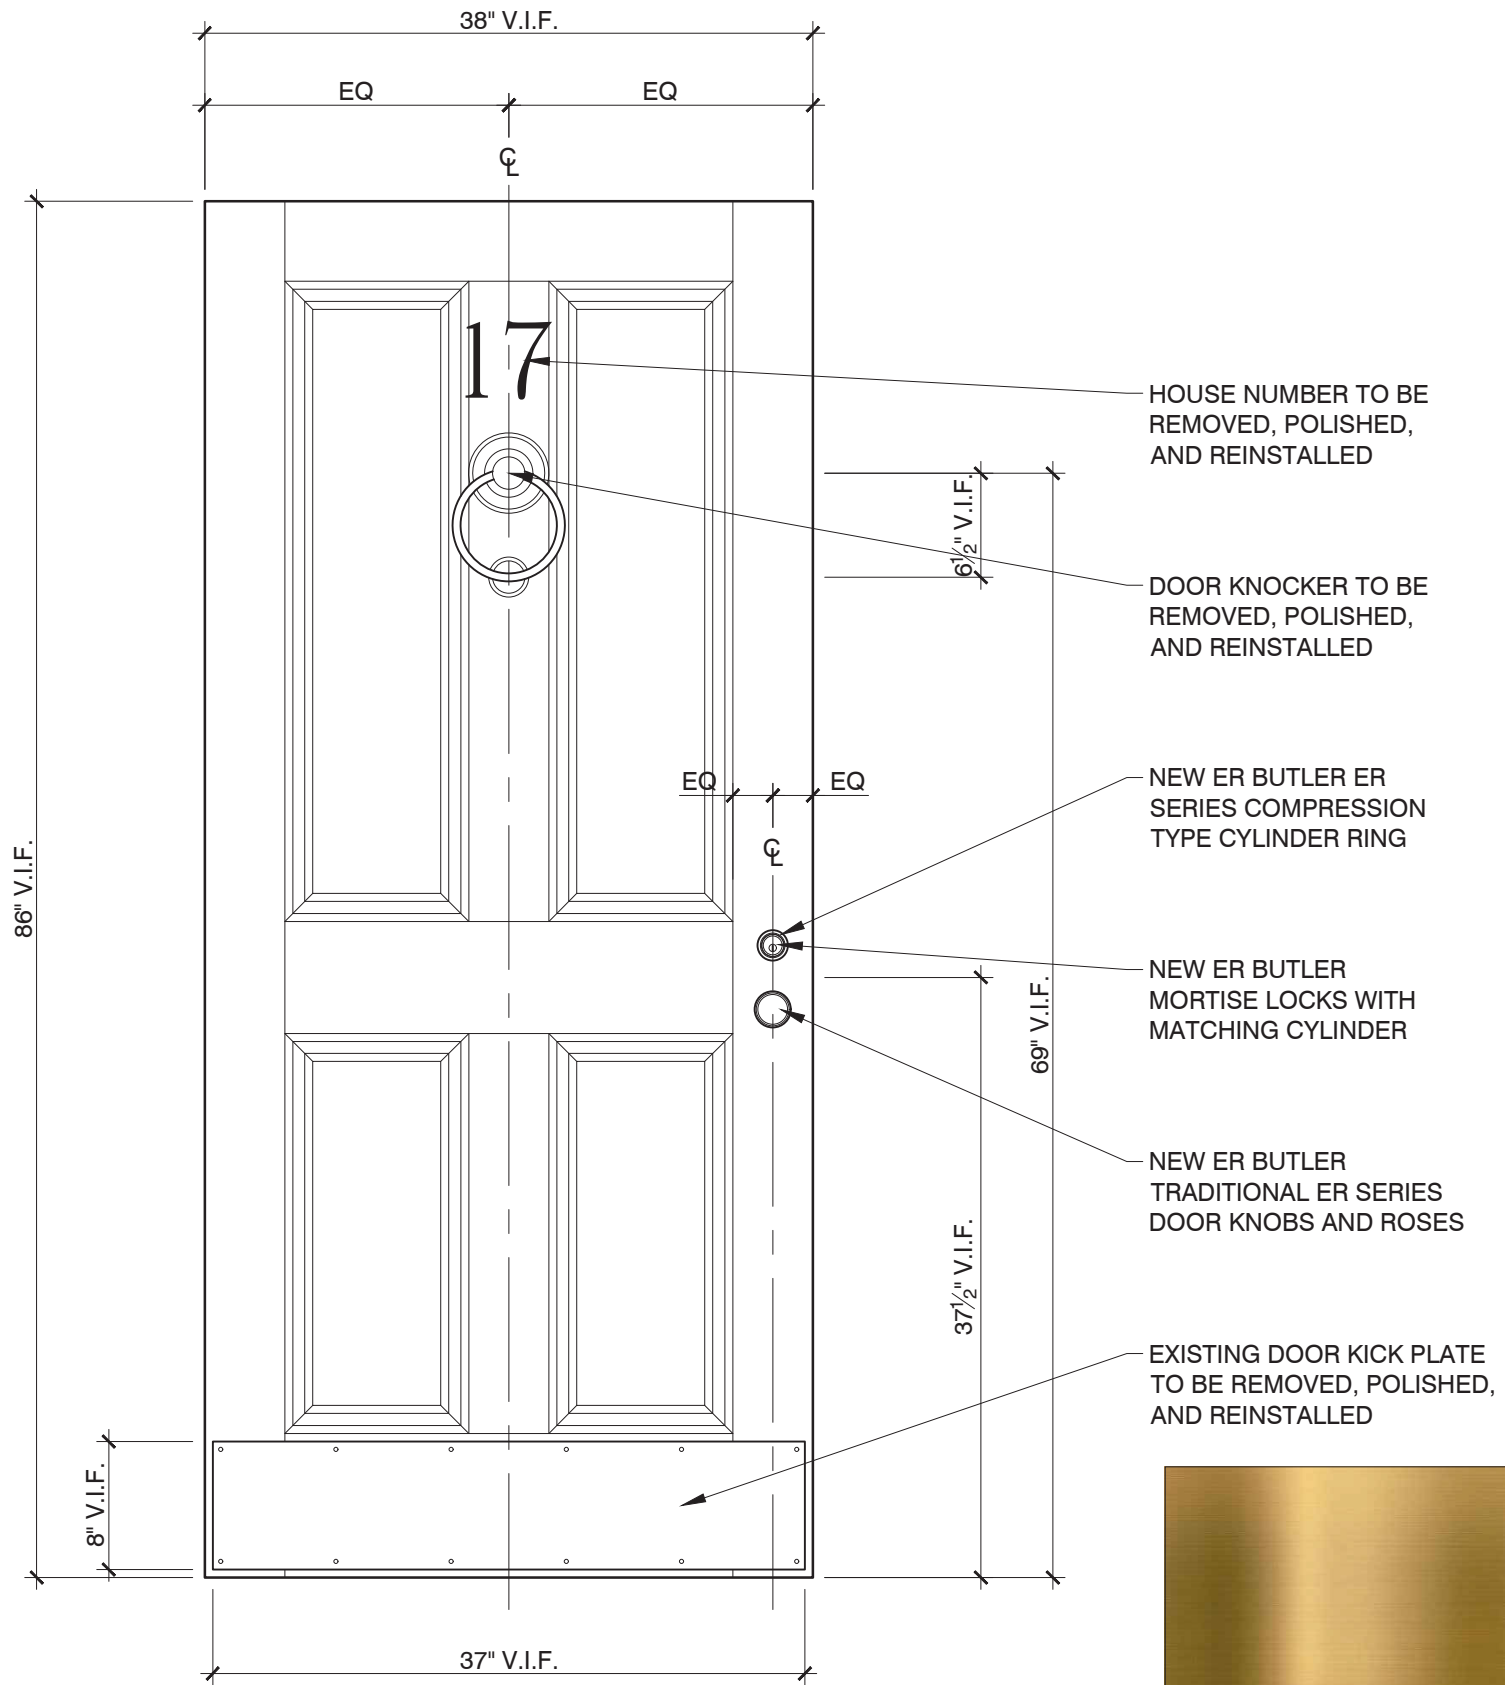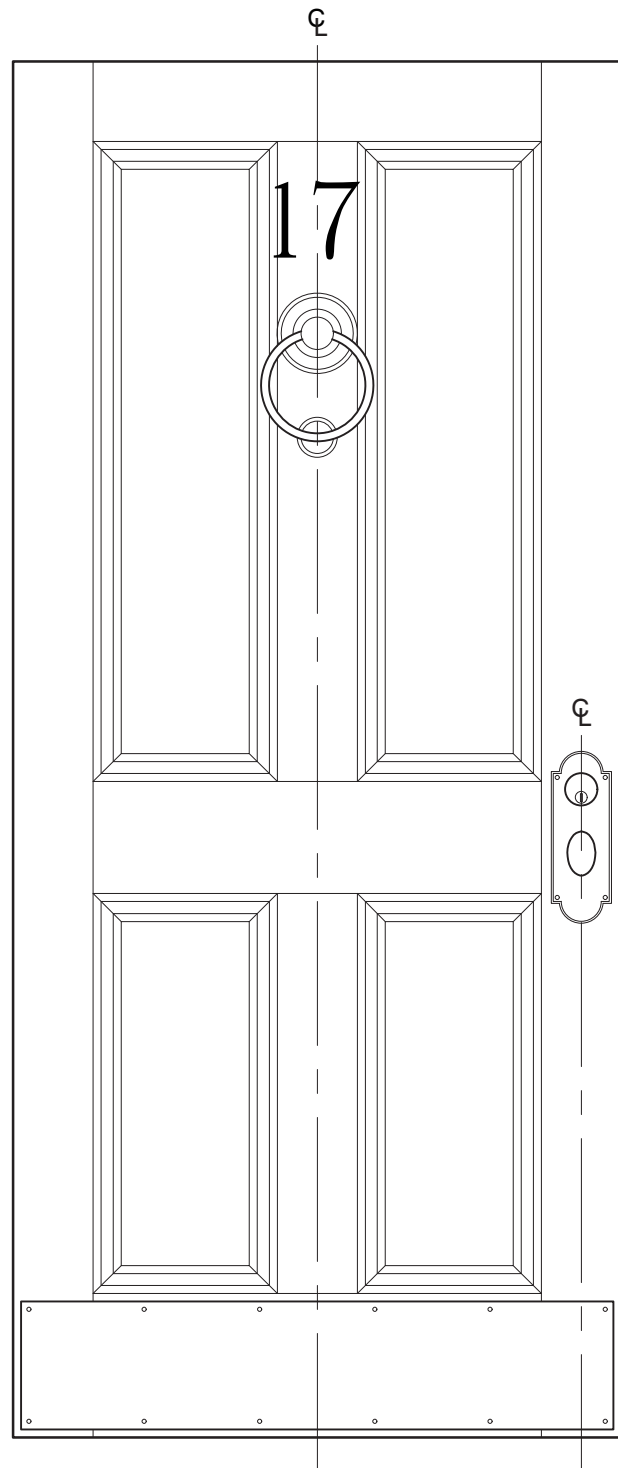

E.R. BUTLER & CO.

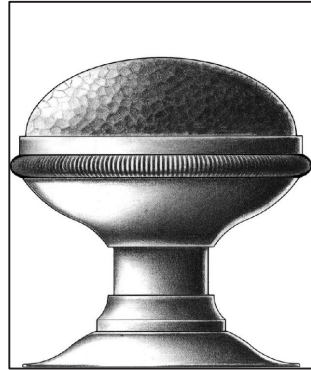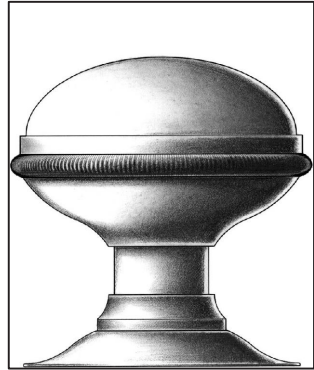

Plain

Hand Hammered

Premium Grade



**Traditional ER Series Door Knobs and Roses**  
*E. Robinson & Co. Collection*

Available in 2 3/4, 2 1/2, 2 1/4, 2, and 1 3/4 inch Diameters for Doors (2 1/2 in. Shown).  
Available in 3 inch Diameters for Use as Center Knobs.  
Also Available in 1 1/2, 1 1/4, 1, 3/4 and 1/2 inch Diameters for Cabinets and Fine Furniture.  
Solid Turned Brass Knob and Rose.  
Standard, Custom Plated and Patinated Finishes Available.

Full Scale

FINE ARCHITECTURAL, BUILDERS' AND CABINETMAKERS' HARDWARE

E.R. BUTLER & CO.




Builders' Grade

**ER Series Compression-Type Cylinder Ring**  
*E. Robinson & Co. Collection*

For Use with Rim and Mortise Cylinders.  
Regularly Furnished with Compression Springs.  
Machined Solid Brass.  
Standard, Custom Plated and Patinated Finishes Available.

Full Scale

FINE ARCHITECTURAL, BUILDERS' AND CABINETMAKERS' HARDWARE

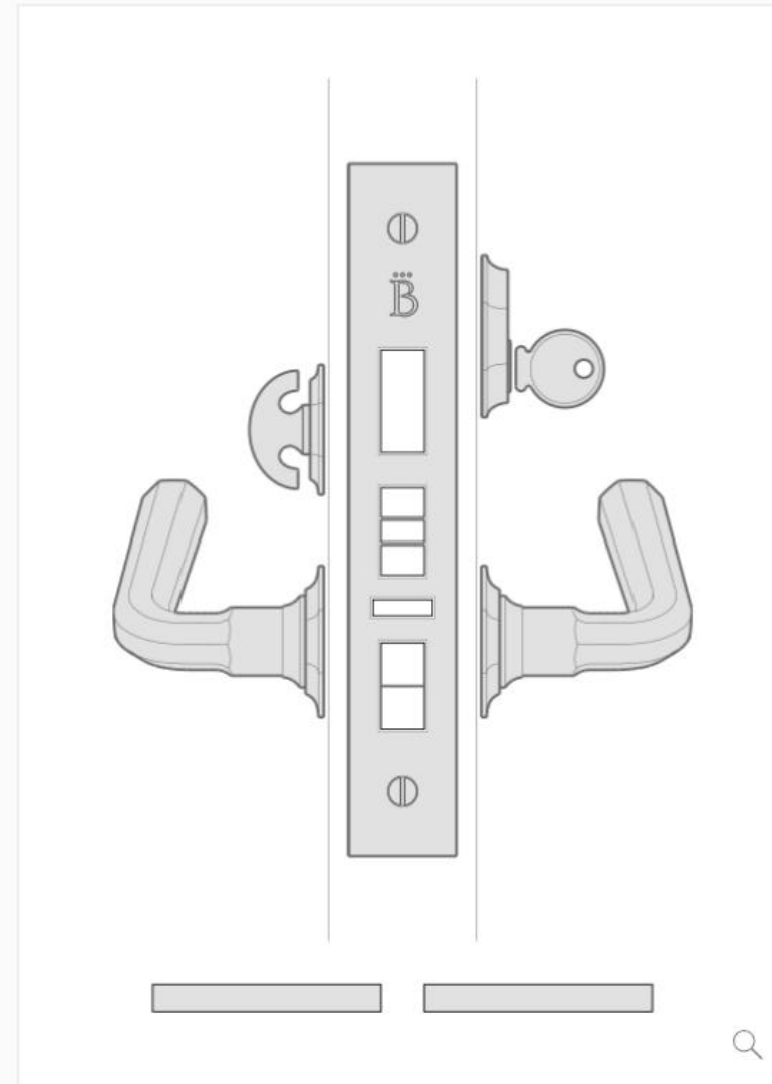

**Entrance or Apartment Lock**

*ANSI F20*

For doors 1 3/4" minimum.

(1 1/4" armour front).

Latch bolt by key outside and handle either side unless outside handle is locked by roggle-action stop. Dead bolt by key outside and thumb turn inside. Inside handle retracts latch and dead bolt. Outside handle remains locked.

Auxiliary latch deadlocks latch bolt and prevents manipulation of locked roggle action stop.

©E.R. Butler & Co. All Rights Reserved.

©E.R. Butler & Co. All Rights Reserved.



# Datasheet



## 2N® IP VERSO LUXURIOUS MODULAR IP INTERCOM

The 2N® IP Verso security intercom is configurable to your needs thanks to its modularity. It provides reliable access control and allows you to easily interface with other systems, achieving even higher site security. Available also in black, with a fingerprint reader, Bluetooth module, or touch display.



- More than 16 different modules
- Discrete HD camera
- Voice communication in HD
- Integration with security systems
- Picture from intercom to your email
- Calls to mobile phone and tablet

### VARIANTS



#### SIGNALING PROTOCOL

SIP 2.0 (RFC - 3261)

#### BUTTONS

Buttons transparent buttons with white backlight and easily removable label  
Number of buttons 1 to 146  
Numeric keypad optional

#### AUDIO

Microphone 1 built-in microphone  
Speaker 2W  
Sound pressure at 1kHz at 1m distance 78dB

#### CAMERA (OPTIONAL)

Resolution - JPEG 1280 x 960px  
Resolution - video call 640 x 480px  
Viewing angle 128° (H), 95° (V), 134° (D)  
Night vision yes

#### TOUCHSCREEN (OPTIONAL)

Buttons and keyboard functions  
Operating temperature -20°C - 60°C  
Coverage level IK07

#### BLUETOOTH READER (OPTIONAL)

Bluetooth Bluetooth 5.0 LE compliant  
Security RSA-1024 and AES-128 encryption  
Range adjustable (short - typically up to 3m\*, long - typically up to 10m\*)  
Modes touch, tap in app, card, motion  
Mobile app. support 2N® Mobile Key (Android 6 and higher, iOS 12 and higher)  
WaveKey support yes

#### RFID CARD READER (OPTIONAL)

Supported frequencies 125 kHz and 13.56 MHz variant (optionally secured version)  
125 kHz EM4xxx  
13.56 MHz ISO14443A, ISO14443B, NFC support  
Secured version HID SE (Seos, iClass SE, Mifare SE), HID Prox

#### FINGERPRINT READER (OPTIONAL)

Sensor optical sensor protected by resistant glass  
Reliability algorithm for fake fingerprint detection  
Resistance resistant to water and dust  
Status signalisation acoustic and with the aid of multicoloured LEDs  
Sensing area large with dimensions of 15.24 x 20.32mm  
Operating temperature -20°C - 55°C  
Certification FBI PIV

#### INTERFACES

Power supply 12V ± 15%/ 2A DC, or PoE  
PoE PoE 802.3af (Class 0 - 12.95W)  
LAN 10/100BASE-TX with Auto-MDIX, RJ-45  
Switch output NC/NO contacts, max 30V/1A AC/DC  
Active switch output 8 to 12V DC depending on Power supply (PoE: 10V; adapter: source voltage minus 2V), max 400mA  
Passive / active input 1; (-30 V to +30 V)  
LAN optional accessory  
Supported protocols SIP2.0, DHCP opt. 66, ONVIF, SMTP, 802.1x, RTSP, RTP, TFTP, HTTP, HTTPS, Syslog

#### MECHANICAL PROPERTIES

Operating temperature -40°C - 60 °C  
Storing temperature -40°C - 70 °C  
Operating relative humidity 10% - 95% (non-condensing)  
Officially certified outdoor coverage IP54, IK08

#### SURFACE MOUNTING FRAME - DIMENSIONS

1 module 107 (W) x 130 (H) x 28 (D) mm  
2 modules 107 (W) x 234 (H) x 28 (D) mm  
3 modules 107 (W) x 339 (H) x 28 (D) mm

#### FLUSH MOUNTING FRAME - DIMENSIONS

1 module 130 (W) x 153 (H) x 5 (D) mm  
2 modules 130 (W) x 257 (H) x 5 (D) mm  
3 modules 130 (W) x 361 (H) x 5 (D) mm

#### FLUSH MOUNTING BOX (MINIMUM HOLE DIMENSIONS)

1 module 108 (W) x 131 (H) x 45 (D) mm  
2 modules 108 (W) x 238 (H) x 45 (D) mm  
3 modules 108 (W) x 343 (H) x 45 (D) mm

\*distances should serve only as an approximate guide and may vary depending on the phone model and installation environment




2N TELEKOMUNIKACE a.s., Modřanská 621, 143 01 Prague 4, CZ, +420 261 301 500, sales@2n.cz, www.2n.cz





1 EXISTING MUDROOM DOOR  
SCALE: 1/2" = 1'-0"

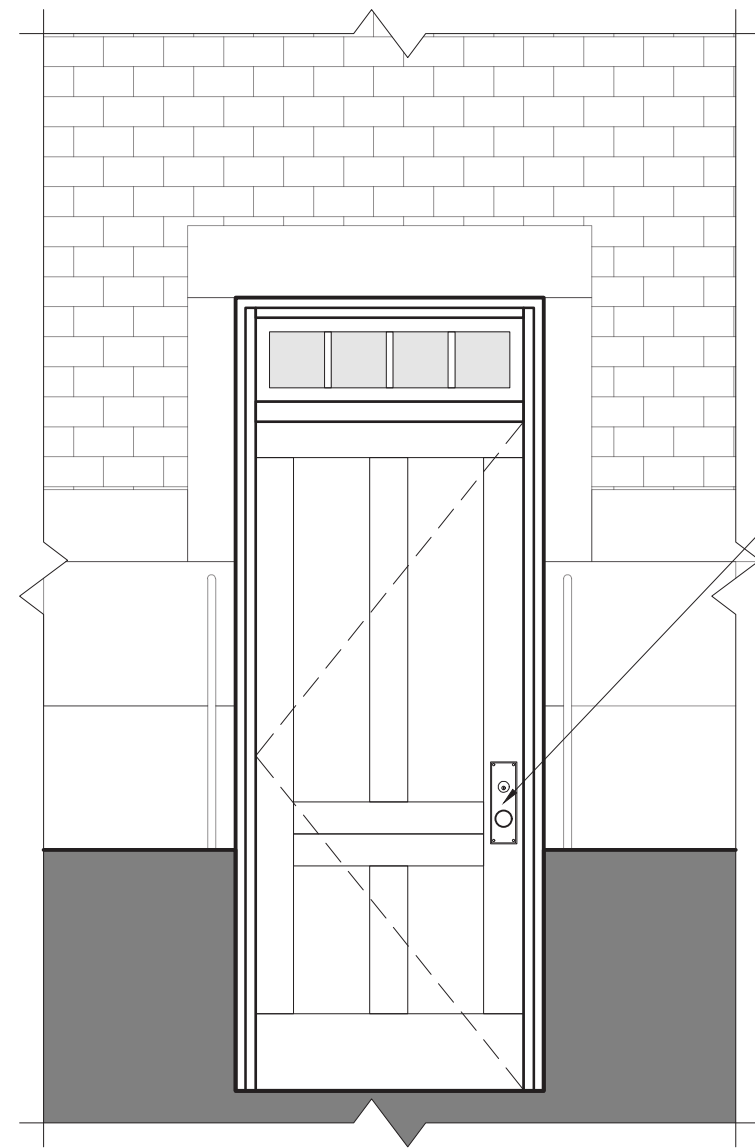

NEW BALDWIN  
BALTIMORE TRIM  
6552.033ENTR  
MORTISE KNOB  
ENTRANCE TRIM

2 PROPOSED MUDROOM DOOR  
SCALE: 1/2" = 1'-0"





# BALTIMORE TRIM

## MORTISE KNOB ENTRANCE TRIM

### ESTATE PORTFOLIO

Model Number:  
6552.033.ENTR

### Key Features

- ✓ The Baltimore Entrance Trim is a straightforward design that promotes a simple and modern look to any door.
- ✓ Shown in Standard Entry Function, but also available in Double Cylinder, Full Dummy and Exterior Only, as well as individual escutcheons Cut for Cylinder, Cut for Emergency Release, Cut for Knob, Cut for Turn Knob and Cut for Privacy.
- ✓ Customize by substituting any knob or lever of your choice or by utilizing the escutcheon plate to create passage, privacy or dummy sets. Thin and thick doors can be accommodated with alternative length spindles and mounting hardware.
- ✓ The mortise application is a unique door condition that requires custom door preparation, specification and installation. The full mortise specification requires multiple components, including this decorative trim. To learn more about specifying mortise, please refer to the "Know Before You Go" section on this page.



## Mudroom Door Hardware

